



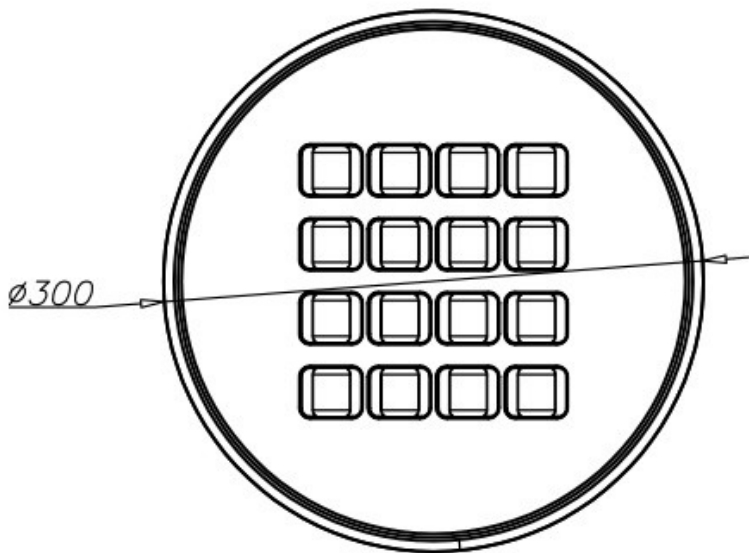

DROP LED

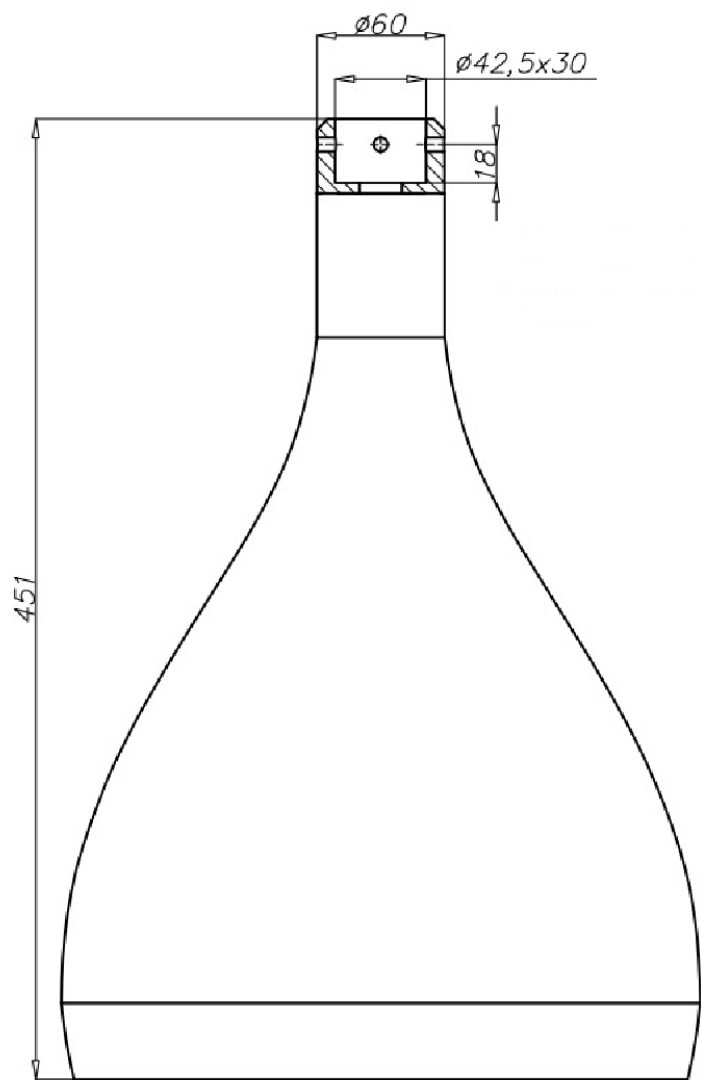

Characteristic

Ingress protection	IP 66
Electrical class	II
Nominal input voltage	120 - 277 V AC
Frequency	50/60 Hz
Operating temperatures	-40°C to +55°C
Material	anodized aluminium alloy
Colour	inox / graphite
Setup	on the extension arm $\varnothing 42 \times 30$; recommended mount height 4-5 m
Optical system	ROSA PMMA lens
LEDs type	CREE XM-L2
LEDs lifetime L90	>50 000h
Warranty	5 years



DROP LED



Technical parameters

Type	DROP LED 48	
Code	214933/6/... ³⁾	214933/3/... ³⁾
Correlated colour temperature [K]	5 000	3 500
Color rendering index CRI	75 ²⁾	>80
LEDs quantity	16	
Supply current [mA]	1 000	
LEDs power [W]	48	
LEDs luminous flux ¹⁾ [lm]	7 000	5 650
Power consumption [W]	55	
Luminaire luminous flux ¹⁾ [lm]	6 550	5 300
Luminaire efficacy [lm/W]	119	96
Weight [kg]	6,5	
Volume [m ³]	0,041	
Windage [m ²]	0,075	

- 1)


including LEDs tolerance parameter accuracy +/- 3%
- 2)

parameter accuracy +/-2
- 3)

code of chosen optics configuration - example: 214933/6/A is a DROP LED 48 with asymmetric optical system
- Low voltage directive LVD 2006/95/WE, norm PN-EN 60598-1, PN-EN 60598-2-3
- Directive EMC 2004/108/WE, norms: PN-EN 55015, PN-EN 61547, PN-EN 61000-3-2, PN-EN 61000-3-3

Optics configurations for DROP LED

A - asymmetric

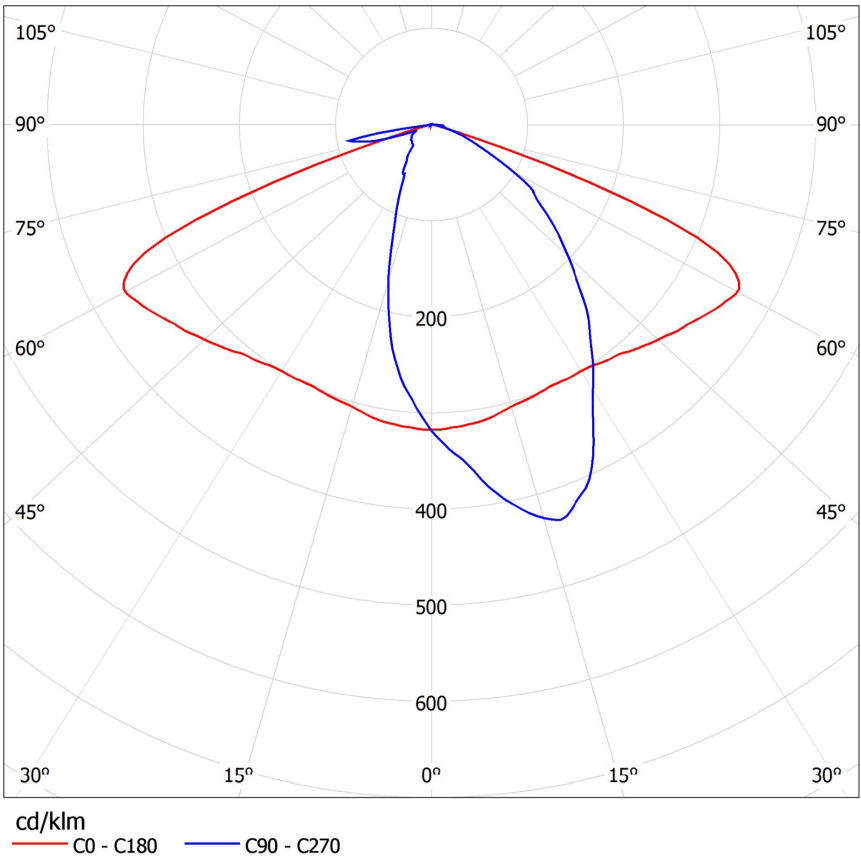

S - symmetric

